


All Dry Stranded Loose Tube Armored Cable (GYFS)

1、 Cable Drawing

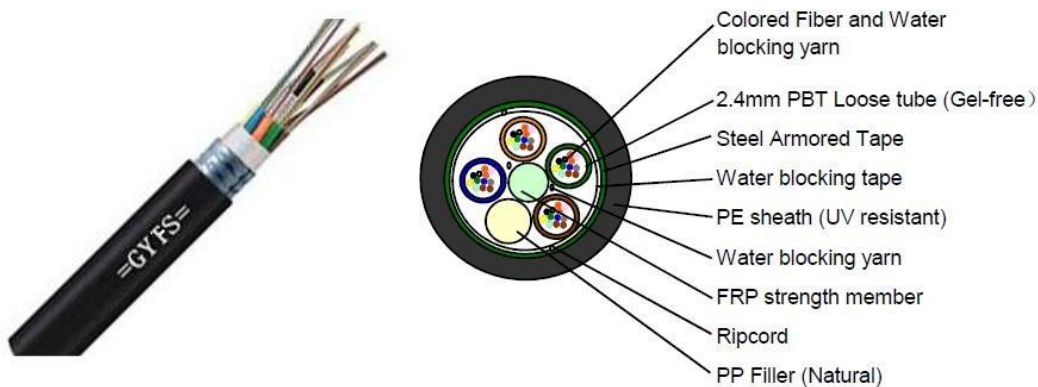

2、 Description

The fibers, 250µm, are positioned in a loose tube made of a high modulus plastic (PBT) and filled with water resistant filling gel. Loose tubes are stranded around the non-metallic central strength member (FRP), cable core is filled with water blocking tape. The Corrugated Steel Tape is longitudinally applied over the cable core, and combined with a durable Polyethylene (PE) sheath.

3、 Features

- Good mechanical and temperature performance
- All section water blocking
- Anti-ultraviolet radiation
- Excellent transmission, mechanical and environmental performance
- Customized color strip Easy installation, easy maintenance
- Lifespan over 30 years

4、 Application

- Local area network system

XDK Communication Equipment (Huizhou) Co., Ltd.

- Duct installation
- Backbone network and metro network

5. Specification

1) Fiber Allocation Scheme

Fiber number	Tube number	Fiber per tube	Fiber type
2-48	1-4	2-12 F/Tube	OS1,OS2,OM1,OM2,OM3,OM4

2) Cable construction details

Items		Description
Number of fiber		2-48 cores
Moisture Barrier		Water blocking system
Ripcord Count		2
FRP strength member		1
Loose tube	material	PBT
	color	Blue, Orange, Green, Brown
	diameter	Φ2.4mm
Tube-filling	material	Tube filling compound
Outer sheath	material	PE,LSZH(can be required)
	Thickness	appro. 1.5 mm
	color	Black (can be required)

3) Standard color of fiber and tube

The color code of the tubes and the individual fibers, shall be in accordance with the table as below:

Standard Colour Identification						
No.	1	2	3	4	5	6
Color	Blue	Orange	Green	Brown	Slate	White
No.	7	8	9	10	11	12
Color	Red	Black	Yellow	Violet	Pink	Aqua
Color 13~24 will be marked with a black tracer. For black color no need marked black tracer, will use nature color instead.						

Note: The color can be required by customers.

4) Cable Mechanical characteristic

Items	Cable diameter	Weight
2 cores to 48 cores	Appro. 12.5mm	Appro. 130kg/km
Installation Temperature range	-40-+70°C	
Operation and transport temperature	-40-+70°C	
Min Bending Radius(mm)	Long term	10D
	short term	20D
Allowable Tensile Strength(N)	Long term	300
	short term	1000
Crush Load (N/100mm)	Long term	300
	short term	1000

5) Requirement for Order

- (1) Fiber sort: Single mode:G652D,G657A1
- (2) Fiber brand: YOFC, Corning, Fiberhome,Fujikura,OFS etc.
- (3) The fiber and tube color: according to stranded color, can be required.
- (4) The cable Size: shall be in accordance with the table, can be required.
- (5) Length of cable: generally is 2KM, can be required.
- (6) Other requirement: can be negotiated.

XDK Communication Equipment (Huizhou) Co., Ltd.

6) Fiber Characteristic

Fiber style		Unit	SM 9/125	MM 50/125	MM 62.5/125
condition		nm	1310/1550	850/1300	850/1300
attenuation		dB/km	≤0.36/0.23	≤3.0/1.0	≤3.0/1.0
Dispersion	1310nm	Ps/(nm*km)	≤18
	1550nm	Ps/(nm*km)	≤22
Bandwidth	850nm	MHZ. KM	≥400	≥160
	1300nm	MHZ. KM	≥800	≥500
Zero dispersion wavelength		nm	≥1302, ≤1322
Zero dispersion slope		nm	≤0.091
PMD Maximum Individual Fiber		ps/km	≤0.2
PMD Design Link Value		Ps(nm ² *km)	≤0.08
Fiber cutoff wavelength λ_c		nm	≥1180, ≤ 1330
Cable cutoff wavelength λ_{cc}		nm	≤1260
MFD	1310nm	um	9.2±0.4
	1550nm	um	10.4±0.8
Numerical Aperture(NA)			0.200± 0.015	0.275± 0.015
Step(mean of bidirectional measurement)		dB	≤0.05	≤0.10	≤0.10
Irregularities over fiber length and point discontinuity		dB	≤0.05	≤0.10	≤0.10
Difference backscatter coefficient		dB/km	≤0.03	≤0.08	≤0.10
Attenuation uniformity		dB/km	≤0.01

Core diameter	um	50±1.0	62.5±2.5
Cladding diameter	um	125.0±0.1	125.0±0.1	125.0±0.1
Cladding non-circularity	%	≤1.0	≤1.0	≤1.0
Coating diameter	um	242±7	242±7	242±7
Coating/chaffinch concentricity error	um	≤12.0	≤12.0	≤12.0
Coating non circularity	%	≤6.0	≤6.0	≤6.0
Core/cladding concentricity error	um	≤0.6	≤1.5	≤1.5
Curl(radius)	um	≤4

6、 Cable marking and cable reel marking

5.1 Cable marking

The cable sheath shall be marked with white characters at intervals of one meter with following information:


- (1) Purchaser' s name
- (2) Cable type
- (3) Fiber type and counts
- (4) Year of manufacture
- (5) Length marking

Notice: cable mark is available if requested by customer.

5.2 Cable reel

Details given below shall be marked with a weather materials on both outer sides of the reel flange :

- (1) Cable type and fiber counts
- (2) Length of cable in meters
- (3) Year of manufacture



Notice: shipping mark is available if requested by customer.

XDK Communication Equipment (Huizhou) Co., Ltd.

7、 Packing Informations

- (1) Packing material: Wooden drum
- (2) Cable end protect material: waterproof-cap
- (3) Packing length: standard length of cable shall be 2 km. Other cable length is also available if required by customer

8、 Our certificates

- (1) ISO9002
- (2) SGS, ROHS
- (3) ULE329066
- (4) REACH

9、 Testing Lab

No	Device name	No	Device name
1	Optical time domain reflectometer (OTDR)	8	GNZV Cable Torsion Testing Machine
2	Fiber Polarization Mode Dispersion	9	GQNV Cable Flexing Testing Machine
3	Fiber Dispersion ,Strain Tester	10	GJRV Cable Winding Testing Machine
4	High Low Temperature Test Chamber	11	GZDV Cable Vibration Testing Machine
5	Cable Impact Testing Machine	12	Cable Water Penetration Test
6	Cable Squash Tensile Testing Machine	13	Fusion Splicer
7	GWQV Cable Bending Tester	14	Cable Water Penetration Test Rig

Fiber Optic Cable Mechanical Performance Testing Laboratory

- (1) Main Testing Type: Precision Test and Mechanical Test.
- (2) Precision Testing Machine: EXFO OTDR, EG&G PMD-440,CD-400.
- (3) Mechanical Performance Testing : Temperature, Impact, Tensile, Bending, Torsion, Flexing, Winding, Vibration, Water Penetration, Fusion Splicer, Water Penetration.

XDK Communication Equipment (Huizhou) Co., Ltd.

10、 Our advantages

- (1) Professional cable manufacturer
- (2) About 10 years experiences in cable industry
- (3) MOQ just 1Km
- (4) ISO, UL , ROSH,REACH...certifications
- (5) Can be customized production of fiber optic cable

